


SIDE WEEPHOLE DETAIL

STEP DETAIL

WHERE CURB GRADE UPSTREAM IS 5% OR GREATER DEPRESS UPSTREAM EDGE OF GRATE TO 10"




DETAIL FOR STEEP CURB SLOPE

## NOTES:

- 1. CONSTRUCTION JOINTS ARE OPTIONAL WHERE SHOWN. KEY DIMENSIONS ARE 3/4 IN. BY 1-1/2 IN.
- 2. WHERE DIMENSION 'H' EXCEEDS 6 FT. USE A MANHOLE BASE WITH A TYPE A INLET TOP.
- 3. CONSTRUCTION JOINTS ARE ALLOWED WHERE THE TOP PORTION OF THE INLET IS TO BE CONSTRUCTED MONOLITHICALLY WITH CURB AND SIDEWALK. THE CONCRETE JOINT SHALL BE LOCATED AT PAVEMENT SUBGRADE.
- 4. WEEPHOLE DEPTH IS A MINIMUM OF 14 IN. BELOW THE GRATE AND MAY VARY WITH ROAD SECTION.
- 5. STEPS SHALL BE STEEL REINFORCED, POLYPROPYLENE PLASTIC IN ACCORDANCE WITH CAL OSHA.
- 6. ALL INLETS SHALL HAVE AN "ANTI-POLLUTION" THERMOPLASTIC DECAL APPLIED AS DIRECTED BY THE PUBLIC WORKS DIVISION MANAGER.

No	Ву	Revision	1	CITY OF SAN PABLO ONE ALVARADO SQUARE, SAN PABLO, CA 94806 (510) 215-3030 FAX 215-3031					
Checked By:				TYPF A INLET				MILITA	
Ар	prove	ed By:			DETAILS			S	STD DET SD-03
PU	BLIC W	ORKS DIVISION MA	NAGER	DATE			NO	SCALE	SHEET 3 OF 3

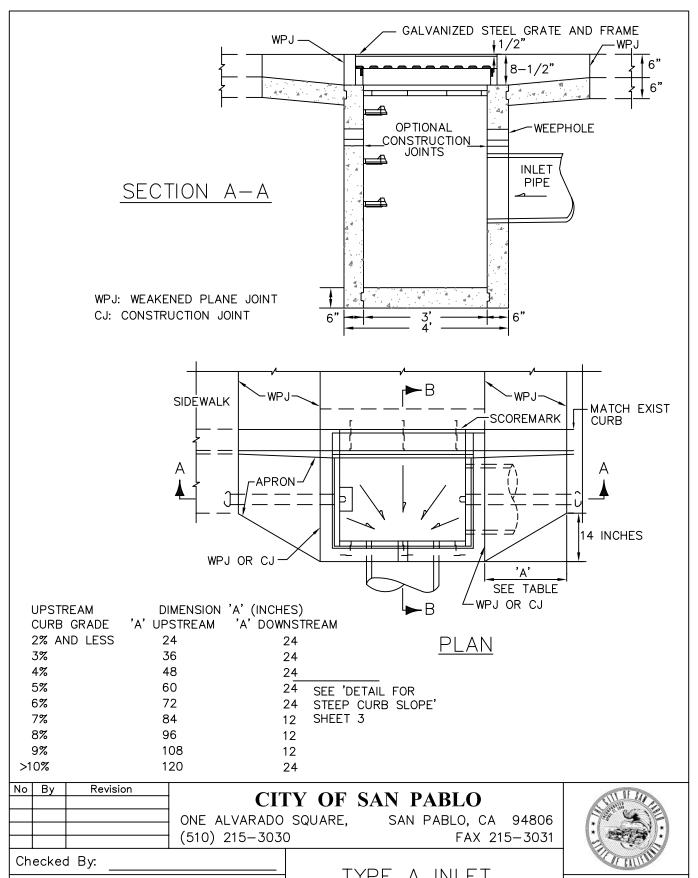

Checked By:

Approved By:


PUBLIC WORKS DIVISION MANAGER DATE

TYPE A INLET PLAN AND SECTION

N STD DET SD-03

NO SCALE

SHEET 1 OF 3

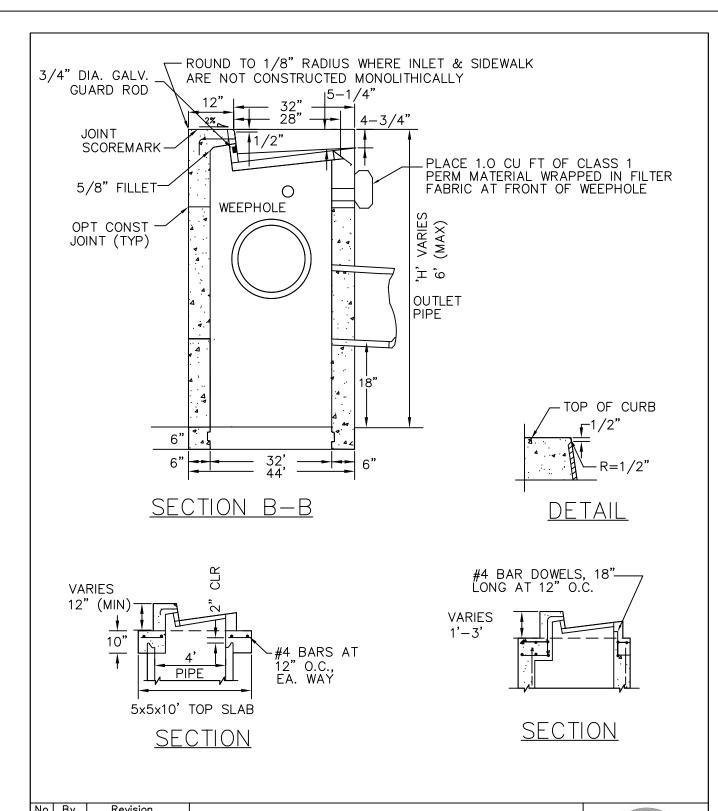

No By Revision	CIT	ΓΥ OF SAN PABLO	TILL AL SAL		
	ONE ALVARADO (510) 215-3030				
Checked By:		TVDF	TO SHUTTER		
Approved By:		TYPE A INLET  SECTION AND OPENINGS	STD DET SD-03		
PUBLIC WORKS DIVISION MA	NAGER DATE	NO SCALE	SHEET 2 OF 3		